



KONGERIKET NORGE  
The Kingdom of Norway

REC'D 19 JUL 2004

WIPO

PCT

Bekreftelse på patentsøknad nr  
*Certification of patent application no*

▽  
**20033034**

▷ Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 2003.07.02

▷ *It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 2003.07.02*

2004.07.13

*Line Reum*

Line Reum  
Saksbehandler

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



**PATENTSTYRET®**  
Styret for det industrielle rettsvern

1d

PATENTSTYRET

03-07-02\*20033034

HLA/UTH

02.07.2003 - 2 JULI 2003

E30643

Kværner Oilfield Products a.s  
Eureka Pump Systems

Joseph Kellers vei 20  
3408 Tranby

Oppfinnere: Kjell Olav Stinessen  
Svendsekroken 9D  
3408 Tranby

Håkon Skofteland  
Krabberudbakken 17  
1337 Sandvika

**Subsea compressor module**

The present invention relates to subsea compressor modules for compressing hydro carbon gases in a wellstream, and more specifically to a subsea compressor module comprising a pressure housing, a compressor and a motor separated by a sealing element.

5

Subsea compressors which are driven by electric motors raise problems of keeping the gas-filled electrical motor as dry as possible, in order to avoid corrosion and other problems related to precipitation of hydrocarbon condensates and liquid water inside the motor. It is of particular importance to avoid presence of liquid water together with content of  $H_2S$  or  $CO_2$  that can form acids and hence accelerated corrosion. These problems are addressed in Norwegian Patents NO 172075 and NO 173197, as well as Norwegian Patent Application 20015199.

10

Known subsea compressor modules employ regular oil lubricated bearings or similar. The inventor has explored the possibilities of employing magnetic bearings in such subsea compressor modules, as this will have several benefits particularly during operation. Magnetic bearings are more reliable and less expensive to operate. Of particular importance is that application of magnetic bearings eliminates lube oil, and therefore potential problems that can occur by: dilution of the lube oil of the hydrocarbon gases that it is in contact with, accumulation of hydrocarbon condensates or water in the lube oil or degradation of the lube oil over time due to its special application in subsea compressor modules. The problem encountered in employing non-canned magnetic bearings in a subsea compressor module is in many respects similar to those associated with employing electric motors: both need a completely dry atmosphere in order to function properly over time. Canned magnetic bearings also exist or are under development. It is claimed that these can operate in the untreated wellstream hydrocarbon gas. There are, however, reasons to believe that it is advantageous for the long term functionality and reliability also of these type of magnetic bearings if they are installed and operated in a dry atmosphere.

20

25

30

It is therefore a need for a system and a method for insuring a completely or nearly completely dry environment for the electric motor and for the magnetic bearings.

35

The present invention meets the abovementioned need, in that it provides a subsea gas compressor module having a pressure housing, which comprises an electric motor and a compressor, driveably connected by at least one shaft, said compressor and motor being mutually isolated by at least one seal, thereby dividing said pressure housing into a first

and a second compartment comprising the compressor and motor respectively. The sub-sea gas compressor according to the invention is characterised in that said at least one shaft is supported by magnetic bearings, controlled by a control unit, wherein said bearings are placed inside the pressure housing of the compressor module. The electronics and electric components of the magnetic bearings are placed inside a separate pressure housing close to the compressor module. This pressure housing is filled by an inert gas, typically nitrogen, or an inert liquid, and have an inside pressure in the range of one bar, or in the range that the electronic components can tolerate. There are a significant number of wires between the housing for the magnetic bearing electronics and the compressor module housing. These wires supplies the magnetic bearings with a controlled magnetization current, as well as transmits signals from sensors of the magnetic bearings to the control electronics in the pressure housing for the magnetic bearings electronics. Special penetrators through the walls of the pressure housings prevents ingress of sea water. The wires between the pressure housing of the electronics and the compressor module can either be connected with subsea mateable connector, or can be connected dry.

The subsea gas compressor according to the invention is furthermore comprising a sealing element, generally defining within said pressure housing a first compartment holding a compressor, and a second compartment holding an electric motor, said compressor and motor being driveably connected by at least one shaft; said first compartment being connected to an inlet line and an outlet line for receiving gas and discharging gas, respectively; said inlet and outlet lines comprising respective valves for closing said lines. The subsea gas compressor according to the invention is characterised by magnetic bearings in said compartments for supporting said at least one shaft; a pressure and volume regulator fluidly connected to said second compartment and to a gas supply of gas and comprising means for sensing respective pressures in said inlet and outlet lines, whereby, based on the magnitude of said sensed pressure, the pressure and volume regulator control the pressure at which gas from said supply is injected into said second compartment.

The invention also comprises a method for controlling the pressure in a subsea compressor module, when the compressor is running, as described above said method being characterised by:

- a) compressing a wellstream gas being fed at a suction pressure into said compressor and said first compartment;
- b) discharging said gas from the first compartment at a discharge pressure;
- c) sensing said suction and discharge pressures respectively;

- d) injecting a dry or inert gas from a supply into said second compartment at an injection pressure,  
 wherein said injection pressure is greater than said suction pressure and said discharge pressure, and whereby fluid flow directly from said first compartment and into said second compartment is prevented.

The invention comprises a method for controlling the pressure in the subsea compressor module as described above, when said compressor is inactive, and the method is characterised by:

- a) sensing a suction pressure in a suction line upstream of said first compartment,  
 b) sensing a discharge pressure in a discharge line downstream of said first compartment,  
 c) injecting a dry or inert gas from a supply into said second compartment at an injection pressure,  
 wherein said injection pressure is greater than said suction pressure or said discharge pressure, whichever is the higher one, and whereby fluid flow directly from said first compartment and into said second compartment is prevented.

An embodiment of the present invention will now be described in more detail, with reference to the accompanying drawings, where like parts have been given like reference numbers.

- Figure 1 is a schematic of an embodiment of the system according to the invention.  
 Figure 2 is a schematic of a second embodiment of the system according to the invention.  
 Figure 3 is a schematic of a further embodiment of the system according to the invention.

Referring now to the drawings, in particular Figure 1, a schematic of the system according to the invention is disclosed. A pressure housing 3 contains an electric motor 1, which is connected to a compressor 2 by means of one or more shafts 13. Both the motor and the compressor are equipped with magnetic bearings. Six bearings are necessary if the shaft 13 is a coupled shaft, i.e. one thrust bearing and two radial bearings in each unit, while only three bearings will be sufficient if the shaft 13 is a single shaft, i.e. one thrust bearing and two radial bearings for the whole compressor module. The pressure housing internal cavity is divided essentially into two compartments by means of a sealing element 14. This sealing element, or shaft seal, is commonly known in the art. The

seal 14 thus essentially divides the internal volume of the pressure housing into a first compartment holding the compressor 2 with magnetic bearings 12', and a second compartment holding the electric motor 1 with magnetic bearings 12. The necessary electronic components for controlling and monitoring the magnetic bearings are symbolised  
 5 by reference numeral 16, which indicate a unit being connected to the magnetic bearings.

Hydrocarbon (wellstream) gas at a suction pressure ( $p_s$ ) fed into the first compartment via the line 11. The gas is being discharged from the compressor at a discharge pressure  
 10 ( $p_d$ ) when the valve 9 is open during operation. During operation, when the compressor 2 is compressing the valve stream gas, valve 8 is closed, while valves 7 and 9 are open. Hydrocarbon gas is thus flowed and compressed in a regular fashion. As mentioned previously, it is of great importance that the second compartment, holding the motor 1, comprises a dry and corrosion free environment. A gas line is therefore connected to a  
 15 gas supply 10 for injecting gas from this supply into the second compartment. This injection of gas at  $p_1$  into the second compartment is facilitated by the pressure and volume regulator 4. The pressure and volume regulator 4 controls the injection pressure based on the sensed suction and discharge pressures through sensing lines 5 and 6 respectively. In order to preventing hydrocarbon gas from ingressing from the first com-  
 20 partment and into the second compartment, the pressure and volume regulator ensures that  $p_1$  always is greater than the suction pressure and/or the discharge pressure. During a shut-down situation, valves 7 and 9 are closed off, while valve 8 is open. In certain transient states, the discharge pressure may be less than the suction pressure. Hence, the pressure and volume regulator 4 must adjust the injection gas pressure ( $p_1$ ) such that the  
 25 injection gas pressure is greater than the suction pressure or the discharge pressure, whichever is the higher.

Figure 2 discloses in principle the same system as Figure 1, but the system now has an alternative source of dry injection gas. In Figure 2, the inert gas from the supply 10  
 30 may, when the compressor is running, be replaced by hydrocarbon gas extracted from the compressor outlet, cooled in the heat exchanger 60, choked in a Joule-Thomson valve 70 prior to entering a scrubber 80. This system and method is disclosed in the Norwegian Patent Application 20015199. In this configuration valve 83 is shut off while valve 82 is open when the compressor is running. Reference numeral 81 identifies  
 35 a conventional scrubber discharge line that typically feeds the collected liquid that also may contain particles, back to the suction side, while reference numeral 120 indicates an injection line for a hydrate inhibitor (optional).

When the compressor is shut down, valve 82 is closed, while valve 83 is open, and the injection gas is from reservoir 10 and injection pressure  $p_1$  controlled as earlier described.

5

An optional method for keeping the dew point of the injection gas below sea temperature during operation, is to mix the hydrocarbon gas extracted from the compressor outlet with a fraction of gas from 10, sufficient to keep the dew point below sea water temperature. Hence the valve 70 can be eliminated, and possibly also the cooler 60 and the  
10 injection line 120 and may be even the scrubber 80.

Figure 3 is another embodiment of the invention as disclosed in Figure 1, where the first compartment essentially has been subdivided into a further compartment, the compressor is still in a first compartment while a third compartment, now defined by the shaft  
15 seal 15, holds a magnetic bearing 12, which is also being subjected to injection gas at  $p_1$ .

As has been described above, the motor and compressor may be connected via one or  
20 more shafts 13 (e.g. a single shaft or coupled shafts). Both the motor 1 and compressor 2 are equipped with magnetic bearings 12. In the case of a coupled shaft, six bearings are necessary, i.e. one thrust bearing and two radial bearings for each unit. With a single shaft, three bearings are sufficient, i.e. one thrust bearing and two radial bearings for the whole compressor module.

25

The shaft seal 14 divides the pressure housing 3 into two compartments:

- (i) a first compartment enclosing the compressor 2, and
- (ii) a second compartment comprising the motor 1 and (optionally) a coupling housing.

30

The compressor module may also be equipped with a compressor shaft seal 15 at the shaft end opposite to the motor side, thus forming a third compartment.

The magnetic bearings of the compressor 2 may be placed in the first compartment if they are of the canned type, in which case compartment three is superfluous, or if it is  
35 judged favourable to have them in a dry atmosphere, they are placed in compartments two and three.

The second (and optionally the third) compartment is pressurized by a gas at  $p_1$ , in order to prevent ingress of hydrocarbon gases from the first compartment. The gas pressurized at  $p_1$  may be an inert gas from the reservoir 10 or (e.g.) a dried hydrocarbon gas extracted from the compressor outlet, heat exchanged against a cooling medium (e.g. seawater) in the heat exchanger 60 and chocked prior to entering the scrubber 80, in accordance with the equipment and process described in Norwegian patent application 20015199. Optionally the gas pressurised at  $p_1$  may be a mix of both gases as described above.

10 In operation, the compressor 2 generates a suction pressure ( $p_s$ ) and a discharge pressure ( $p_d$ ). Discharge pressures typically lie in the region  $p_d = 70$  bar to 150 bar, and the suction pressure typically in the region 40 bar to 140 bar.

15 In operation, valves 7 and 9 are open, while valve 8 is closed off, and  $p_d > p_s$ . In order to prevent gas ingress into the second (and optional the third) compartment, the second compartment pressure must exceed the suction pressure, i.e.:  $p_1 > p_s$ .

This is achieved by the pressure and volume regulator 4, sensing  $p_s$  through line 5 and adjusting  $p_1$  accordingly.

20

At shut-down, valves 7 and 9 are closed off, while valve 8 is open. In certain transient states,  $p_d < p_s$ . Hence, the regulator 4 must adjust the inert gas pressure such that  $p_1 > p_s$  or  $p_1 > p_d$ , whichever is the higher.



1	Electric motor
2	Compressor
3	Pressure housing
4	Pressure and volume regulator
5	Pressure sensing line, suction side
6	Pressure sensing line, discharge side
7	Compressor inlet valve
8	Shut-off valve
9	Compressor outlet valve
10	Inert gas supply
11	Natural gas inlet line
12, 12'	Magnetic bearing
13	Shaft
14	Shaft seal
15	Shaft seal
16	Magnetic bearing control unit
17	Balance drum
60	Heat exchanger
70	Choke valve
80	Scrubber
81	Discharge line
82	Shut-off valve
83	Shut-off valve
120	Hydrate inhibitor injection



P a t e n t   c l a i m s

1.

A subsea gas compressor module having a pressure housing (3) which comprises:  
 5 an electric motor (1) and a compressor (2), drivably connected by at least one shaft (13);  
 said compressor and motor being mutually isolated by at least one seal (14), thereby  
 dividing said pressure housing (3) into a first and a second compartment comprising the  
 compressor and motor, respectively;

c h a r a c t e r i z e d   i n   t h a t

10 - said at least one shaft is supported by magnetic bearings (12) controlled by a control  
 unit (16), said control unit being placed externally of said pressure housing, and con-  
 nected to said magnetic bearings by means of wire connections or subsea mateable con-  
 nectors.

15 2.

The gas compressor module of claim 1,

c h a r a c t e r i z e d   i n   t h a t

said pressure housing is oriented vertically

20 3.

The gas compressor module of claim 1,

c h a r a c t e r i z e d   i n   t h a t

said motor is placed above said compressor, wherein said second compartment is lo-  
 cated above said first compartment.

25

4.

A subsea gas compressor module having a pressure housing (3) comprising a sealing  
 element (14), generally defining within said pressure housing a first compartment hold-  
 ing a compressor (2) and a second compartment holding an electric motor (1), said

30 compressor and motor being drivably connected by at least one shaft (13); said first  
 compartment being connected to an inlet line (11) and an outlet line for receiving gas  
 and discharging gas, respectively; said inlet and outlet lines comprising respective val-  
 ves (7, 9) for closing said lines, c h a r a c t e r i z e d   b y  
 - magnetic bearings (12) in said second compartment and magnetic bearings (12') in the  
 35 first compartment for supporting said at least one shaft;

- a pressure and volume regulator (4) fluidly connected to said second compartment and  
 to a gas supply (10;11) of gas and comprising means for sensing respective pressures in

said inlet and outlet lines; whereby, based on the magnitude of said sensed pressure, the pressure and volume regulator controls the pressure at which gas from said supply is injected into said second compartment.

5 5.

The gas compressor module of claim 4,

c h a r a c t e r i z e d i n t h a t  
said first compartment is subdivided into a third compartment by means of another sealing element (15), comprising another bearing (12).

10

6.

The gas compressor module of claims 4 and 5,

c h a r a c t e r i z e d i n t h a t  
said pressure and volume regulator also is connected to said third compartment,  
15 whereby, based on the magnitude of said sensed pressure, the pressure and volume regulator controls the pressure at which gas from said supply is injected into said third compartment.

7.

20 The gas compressor module of claims 4 and 5,

c h a r a c t e r i z e d i n t h a t  
said sealing elements (14, 15) are shaft seals associated with said shaft (13).

8.

25 The gas compressor module of claims 4 – 7,

c h a r a c t e r i z e d i n t h a t  
said gas supply (10) is an inert gas supply, whereby inert gas is injected into said second compartment.

30 9.

The gas compressor module of claims 4 – 7,

c h a r a c t e r i z e d i n t h a t  
said gas supply (11) is a well stream, and hydrocarbon gas is extracted from the compressor outlet, passed through a heat exchanger (60), a choke valve (70), a scrubber  
35 (80), whereby dried hydrocarbon gas is injected into said second compartment.

10.

The gas compressor module of claims 4 – 7,

c h a r a c t e r i z e d i n t h a t

the hydrocarbon gas extracted from the compressor outlet is mixed with a fraction of

5 inert gas, in order to keep the dew point below that of the cooling medium.

11.

The gas compressor module of claim 4,

c h a r a c t e r i z e d i n t h a t

10 said fluid is composed of a mix of inert gas and hydrocarbon gas, with a proportion of inert gas to make the dew point of the mix suitable to avoid condensation, preferably below sea water temperature at all modes of operation or shut-down.

12.

15 A method for controlling the pressure in a subsea compressor module according to claims 1 or 4, comprising:

- a) compressing a well stream gas being fed at a suction pressure ( $p_s$ ) into said compressor (2) in said first compartment;
- b) discharging said gas from the first compartment at a discharge pressure ( $p_d$ )

20

c h a r a c t e r i z e d b y

- c) sensing (4, 5, 6) said suction and discharge pressures
- d) injecting a dry or inert gas from a supply (10; 11) into said second compartment at an injection pressure ( $p_i$ ),

25

wherein said injection pressure is greater than said suction pressure and said discharge pressure, and whereby fluid flow directly from said first compartment and into said second compartment is prevented.

30 13.

A method for controlling the pressure in a subsea compressor module according to claims 1 or 4, when said compressor (2) is inactive,

c h a r a c t e r i z e d b y

- a) sensing (4, 5, 6) a suction pressure ( $p_s$ ) upstream of said first compartment;
- 35 b) sensing (4, 5, 6) a discharge pressure ( $p_d$ ) downstream of said first compartment;

c) injecting a dry or inert gas from a supply (10; 11) into said second compartment at an injection pressure ( $p_1$ ),

wherein said injection pressure is greater than said suction pressure and said discharge pressure, and whereby fluid flow directly from said first compartment and into said second compartment is prevented.

14.

The method of either claims 12 or claim 13,

c h a r a c t e r i z e d i n t h a t

10 said dry or inert gas is injected at an injection pressure into a third compartment defined by a sealing element (15).

15.

The method of either claims 12 or claim 13,

15 c h a r a c t e r i z e d i n t h a t

said gas supply (10) is an inert gas supply, whereby inert gas is injected into said second compartment.


16.

20 The method of either claims 12 or claim 13,

c h a r a c t e r i z e d i n t h a t

said gas supply (11) is a well stream, and hydrocarbon gas is extracted from the compressor outlet, passed through a heat exchanger (60), a choke valve (70), a scrubber (80), whereby dried hydrocarbon gas is injected into said second compartment.

25



## Abstract


Ref. E30643

A subsea gas compressor module having a housing comprising a sealing element (14) generally defining within said pressure housing at first compartment holding a compressor (2) and a second compartment holding an electric motor (1), said compressor and motor being driveably connected by at least one shaft (13). The first compartment is connected to an inlet line (11) and an outlet line for sealing hydro carbon gas and for discharging gas. The second compartment comprises magnetic bearings (12) for supporting said at least one shaft, and a pressure and volume regulator is fluidly connected to said second department and a gas supply (5; 11) of gas, and comprises means for sense in respective pressures in the inlet and outlet lines were by, based on a magnitude of said sense pressure, the pressure and volume regulator controls the pressure at which gas is injected into said second compartment. The subsea gas compressor module is for ever characterised in that at least one shaft is supported by magnetic bearings controlled by control unit (16), where the bearings and control unit are placed in at least one pressure housing comprising a fluid having a controlled pressure, whereby said bearing and control unit are protected from the ingress of the sea water.



PATENTSTYRET


03-07-02\*20033034

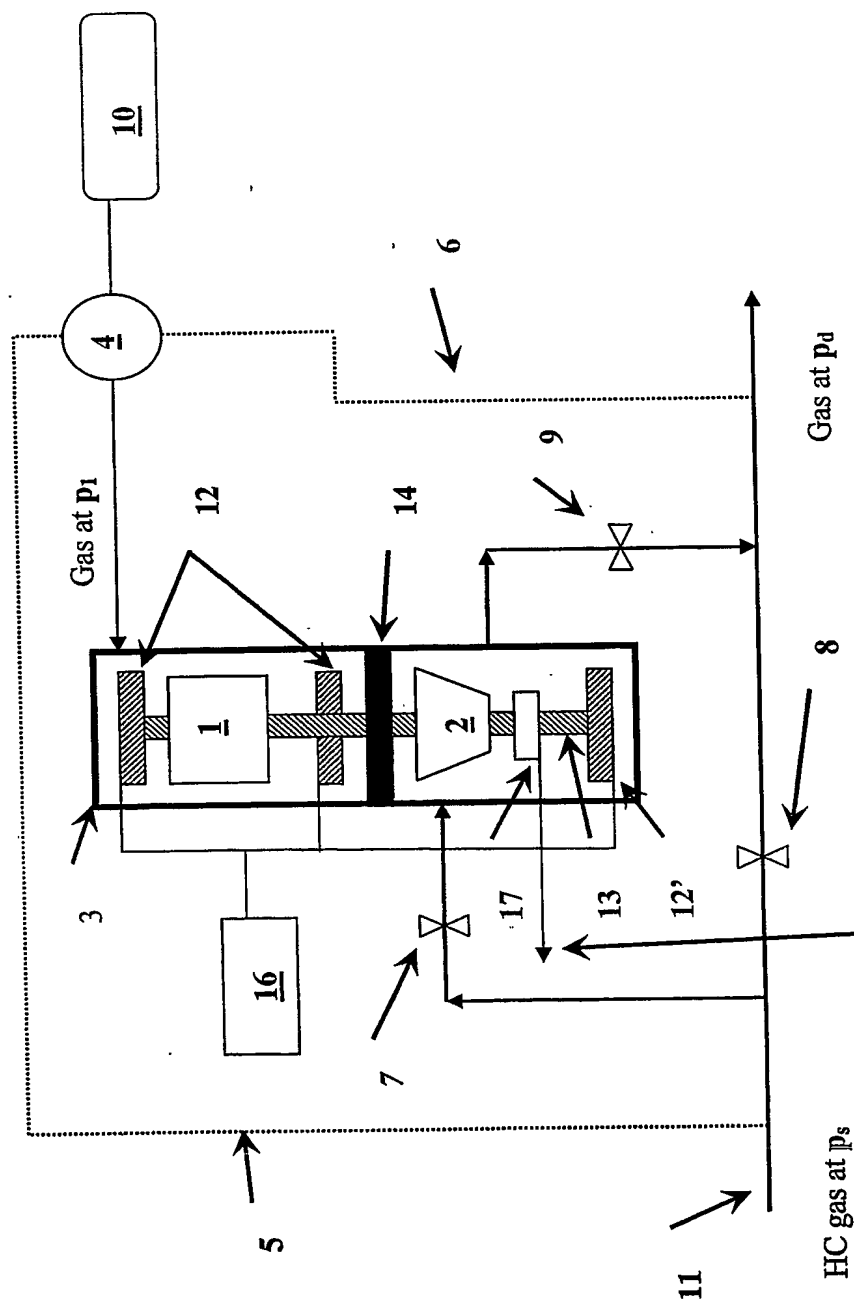

Leakage to suction side



FIGURE 1

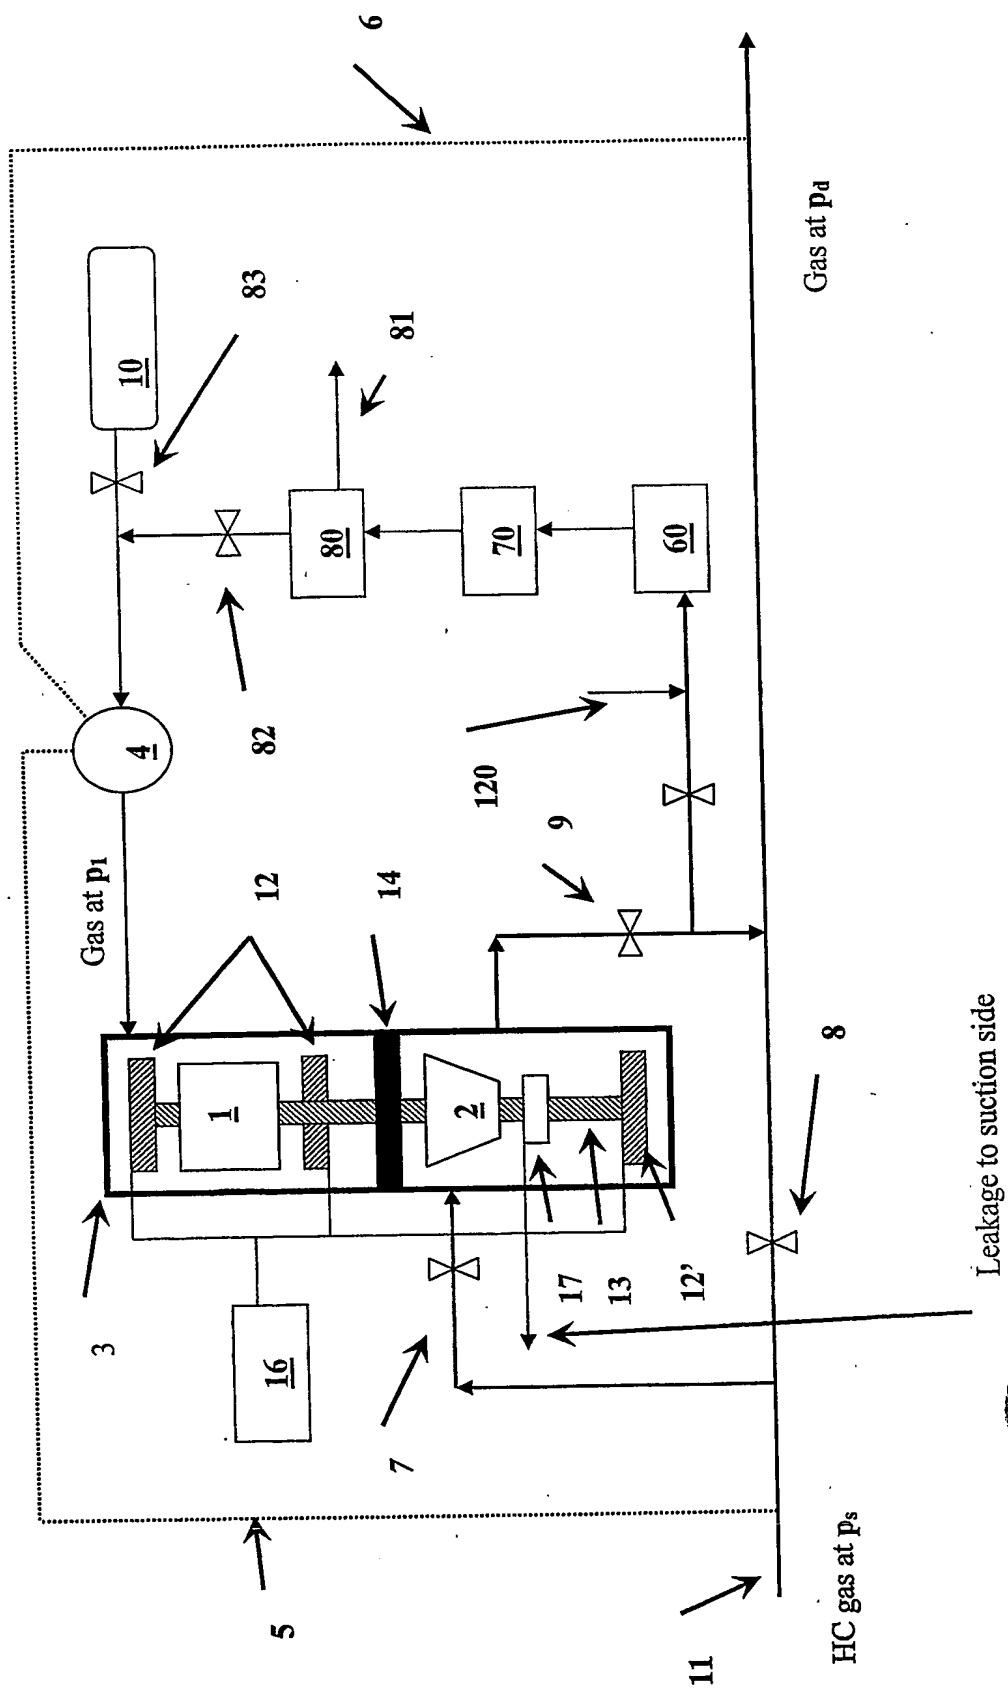

**FIGURE 2**





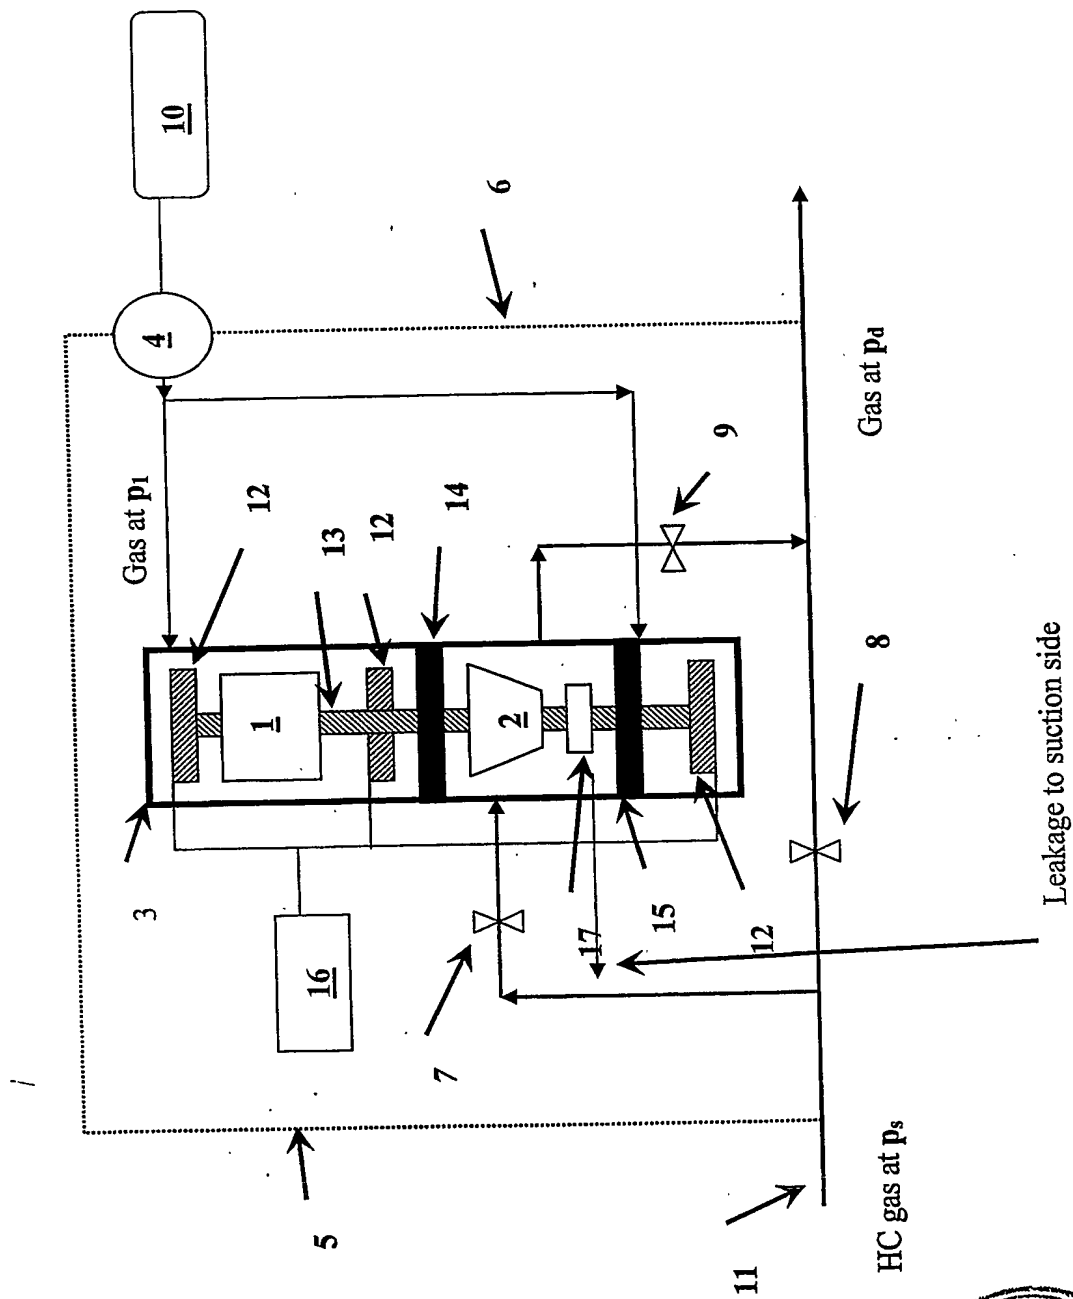


FIGURE 3